




# ExMP80R

## Explosion Proof Mobile Lighting Equipment (Area Lights)



### Application

Suitable for explosive environment Class II Zone 1, 2 and Class III Zone 21, 22. Designed for a multitude of professional contexts, spanning maintenance, disaster relief, emergency response, incident management and construction. They deliver essential high-intensity illumination to ensure operational efficiency and safety in critical scenarios.

### Parameters

Certifications (pending): IECEx, ATEX		Battery type: 12×21700 lithium battery	
Ex Mark (IECEx):	Ex eb ib mb IIC T4 Gb; Ex tb IIIC T130°C Db	Battery capacity:	43.2V / 5000mAh
Ex Mark (ATEX):	⚠ II 2 G Ex eb ib mb IIC T4 Gb;	Charging time:	< 7 h
	⚠ II 2 D Ex tb IIIC T130°C Db	Recharging cycles:	500 cycles
Usage:	II Zone 1/2, and III Zone 21/22		
Working ambient temp.:	-20°C≤Tas+55°C	Lamp rotation angle:	Horizontal: 300° / Vertical: 115°
Ingress protection:	IP66	Outline dimension:	454.5×185×260mm(folding) / 800mm(rising up)
Corrosion-proof grade:	WF2	Weight:	< 7 Kg
CCT:	6500K	Warning light color:	Red/Green/Yellow/Blue/White/Reddish blue (optional)

Lighting mode	Floodlight	Spotlight	Floodlight+Spotlight (high)	Floodlight+Spotlight (low)
Beam angle (°)	132	27	27 (central) / 132 (outer circle)	27 (central) / 132 (outer circle)
Power (W)	25	25	55	15
Duration hour (H)	> 10	> 10	> 6	> 18
Lumen (lm)	2500	2500	5500	1500
Beam distance (m)	/	200	215	112
Vertical angle 70°	50	15	50	50
Irradiation area m²				
Illumination				

Note: The above parameters are design values. The actual values are subject to certification testing.


### Description

- The lighting equipment consists of a lamp head, a lifting pole and a housing body.
- The lamp head and housing are electrically connected by built-in cord through lifting pole. The lifting pole extends up to maximum 800mm, suitable for lighting in the work area for 1-4 personnel.
- The housing is molded using PA engineering plastic, known for its lightweight, corrosion resistance. The buttons are made of tough, wear-resistant and chemical-resistant high performance nylon, providing a comfortable and long-lasting use.
- It offers four lighting modes-
  - (1) floodlight
  - (2) spotlight
  - (3) floodlight + spotlight (high)
  - (4) floodlight + spotlight (low) - with one-touch switching.
- It is equipped with work warning lights in the back of the headlight for enhanced safety and visibility.
- It is lightweight with smart structure. It can be not only hand-held as a portable mobile lighting or placed at different heights for lighting, but also raise the lamp head to achieve wide area lighting.


### Features







- 4 lighting modes:
- Floodlight
  - Spotlight
  - Floodlight + spotlight (high)
  - Floodlight + spotlight (low)
- Adjust to the desired lighting mode.

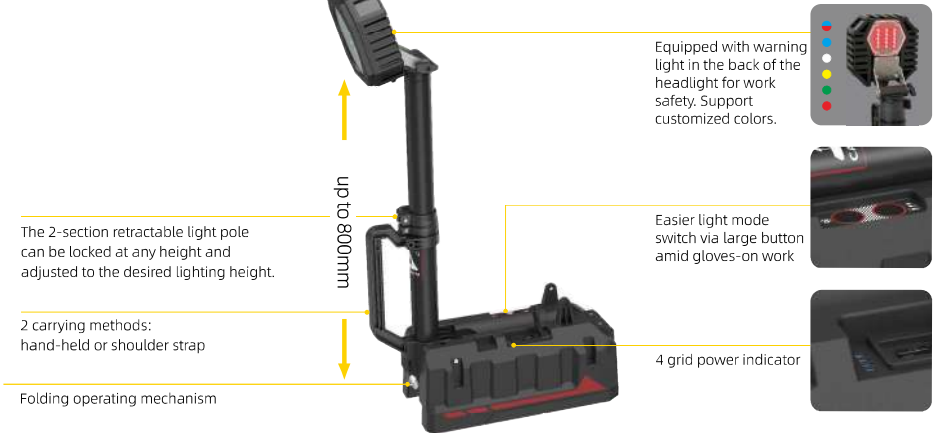

Order specifications

Illustration	Description	Order No.
	Explosion Proof Mobile Lighting Equipment (Area Lights) + Adapter	ExMP80R-□-□-01
● R-Red ● G-Green ● Y-Yellow ● B-Blue ○ W-White ● RB-reddish blue      Code of warning light flash color		
Ⓜ GB Ⓜ EN Ⓜ BS Ⓜ ANSI Ⓜ AS Ⓜ JIS      Code of plug		

Spare parts

Illustration	Description	Weight (g)	Order No.
Shoulder carrying strap 	/	97	1000/11-02-04
Lithium battery pack 	43.2V / 5000mAh	1200	1000/05-R81-01-Ex
Power supply 	Input: 24V DC/2.5A Output: 18V DC (lighting equipment) 12V DC (warning light)	440	8281R-DR-Ex
Adapter 	Input: 100-240V 50/60Hz, 2A Output: 24V DC, 4A	700	1000/12-02-□
Ⓜ GB Ⓜ EN Ⓜ BS Ⓜ ANSI Ⓜ AS Ⓜ JIS      Code of plug			

Outline dimension (unit: mm)

